

# Panasonic Rotary Compressors




## R22 High Temperature

Model	Displ. (cc)	HP	Capacity @+7.2°C (Watts)	Connection (Inch)		Capacitor
				Suction	Discharge	
2P14	13.2	3/4	2185	3/8	1/4	25uF
2P17	16.4	1	2745	3/8	3/8	25uF
2K22	22.5	1 1/2	3810	1/2	3/8	30uF
2K28	28.2	1 3/4	4665	1/2	3/8	40uF
2V32	31.4	2	5275	1/2	3/8	40uF
2V36	35.6	2 1/4	6070	1/2	3/8	50uF
2V42	41.6	2 1/2	7200	5/8	3/8	50uF

*45°C condensing temperature, 11K Superheat, 8.3K Subcooling  
Mineral Oil Charged*

**For more information, please call Refrigeration Distributors (02) 9743 7911  
1/10 Ferngrove Place, Chester Hill NSW 2162  
[www.rdl.com.au](http://www.rdl.com.au)**

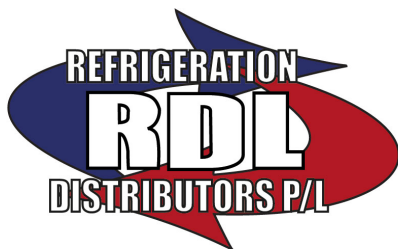

Wholesale-Consulting-Engineering

